


ClimaGrün

Product data sheet

Item number: 104020

Slide foil CG-GF 200

as a sliding layer under surfaces that can be driven over or walked on

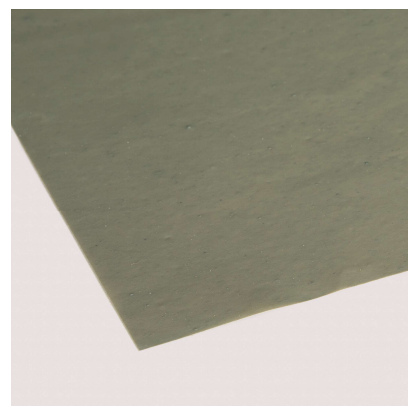

Technical data

Material	LDPE (soft polyethylene)
Nominal thickness	approx. 0,2 mm
Weight	approx. 185 g/m ²
Tensile strength (DIN EN 12311)	approx. 10–25 N/mm ²
Tear strength (DIN EN 12310)	MD: ≥ approx. 14 N/mm ²
Modulus of elasticity	approx. 150–250 N/mm ²
Dimensions	Dimensions: approx. 4,0 x 50,0 m (200 m ²) Roll width: approx. 1,0 m
Delivery form	9 rolls on one-way pallet 80 x 120 cm
Delivery weight	approx. 380 kg per pallet
Storage	Dry and UV-protected

Suggested tender text:

ClimaGrün slide foil CG-GF 200, as a sliding layer under surfaces that can be driven over and walked on, with the following properties: Material LDPE (soft polyethylene), nominal thickness approx. 0.2 mm, weight approx. 185 g/m², tensile strength (DIN EN 12311) approx. 10–25 N/mm², tear strength (DIN EN 12310) MD: ≥ approx. 14 N/mm², modulus of elasticity approx. 150–250 N/mm², bitumen and polystyrene compatible, supply and lay professionally in 2 layers with 10 cm overlap.